

Induprint PAC 907

- ◆ Emulsion polymer based on methacrylates, carboxylated

Fields of Application: **Printing Inks and Overprint Varnishes**

- ◆ Binder for water-based overprint varnishes
- ◆ Let-down vehicle for water-based flexographic and gravure-printing inks (i. e. for corrugated board, paper bags...) (post-print and **pre-print**)

Characteristics:

- ◆ high heat resistance
- ◆ excellent resolubility
- ◆ high photostability
- ◆ excellent gloss
- ◆ very good pigment wetting

Appearance	:	white emulsion
Solid Contents * (DIN EN ISO 3251)	:	39 – 41 %
Viscosity at 20°C (DIN 53019-1) (Anton Paar RheolabQC; MS: CC27; D=378s ⁻¹)	:	< 100 mPa·s
pH Value * (DIN ISO 976)	:	4.0 – 5.0
MFFT (DIN ISO 2115)	:	appr. + 85°C
Glass Temperature (DSC) (DIN 51007)	:	appr. + 116°C
Acid Value * (DIN ISO 2114)	:	50 - 60 mg KOH/g emulsion
Ionicity	:	anionic
Freeze/Thaw Stability	:	stable

2002-01-15 / Version 04

* Specification values listed in our certificate of analysis

please turn

Induprint PAC 907

Remarks:

Induprint PAC 907 is a very hard polymer. Nevertheless after neutralization with ammonia solution or other amines it forms a film at room temperature.

Induprint PAC 907 is free of glykols or glykol ethers.

The ammoniacal solution of Induprint PAC 907 is free of blocking at temperatures up to 250°C and pressures of 5 bar. Therefore Induprint PAC 907 is an ideal binder for pre-print application.

Neutralization:


50.0 g	Induprint PAC 907
50.0 g	water
<u>3.5 g</u>	ammonia solution 25 %
103.5 g	

Starting Formulation:


No. 44 Overprint varnish

This data sheet is for your advice and information. Indulor disclaims any liability incurred with the use of these data or suggestions.

flow time of a neutralised solution of Induprint PAC 907 after manufacturing
(pH 8.5)

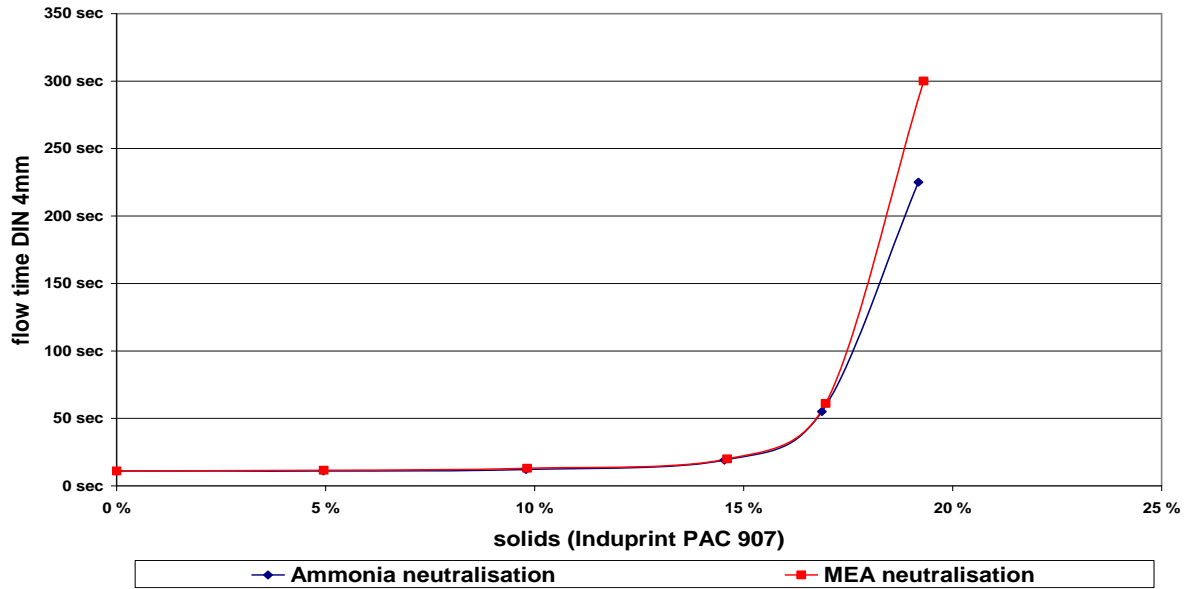


flow time of a neutralised solution of Induprint PAC 907
after 24 h

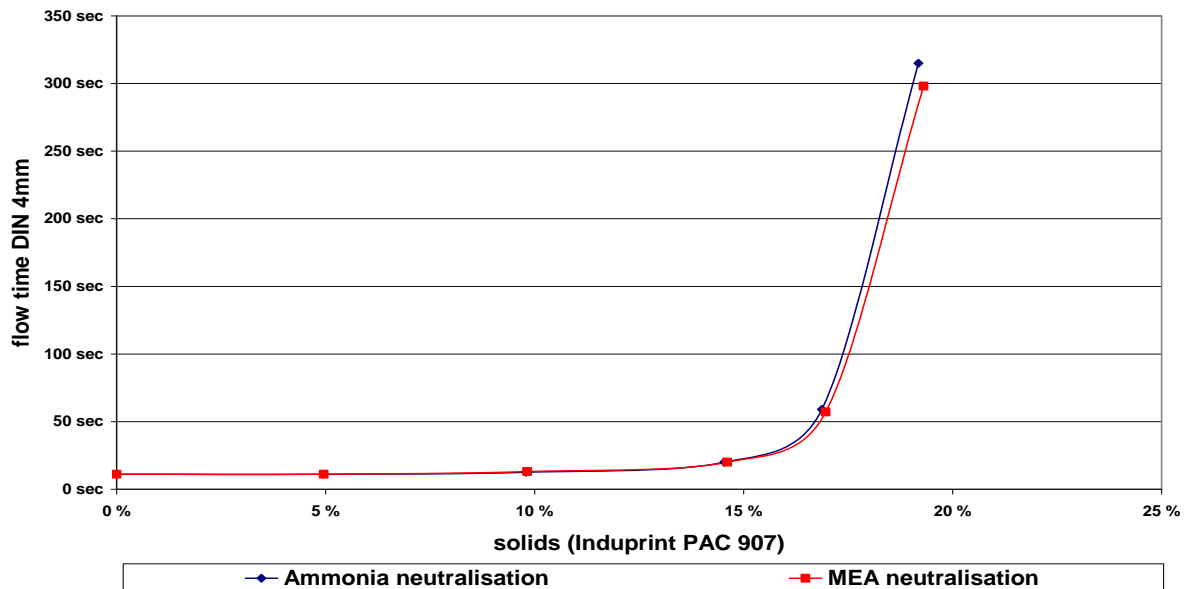

please turn

flow time of a neutralised solution of Induprint PAC 907
(solids appr. 20%)

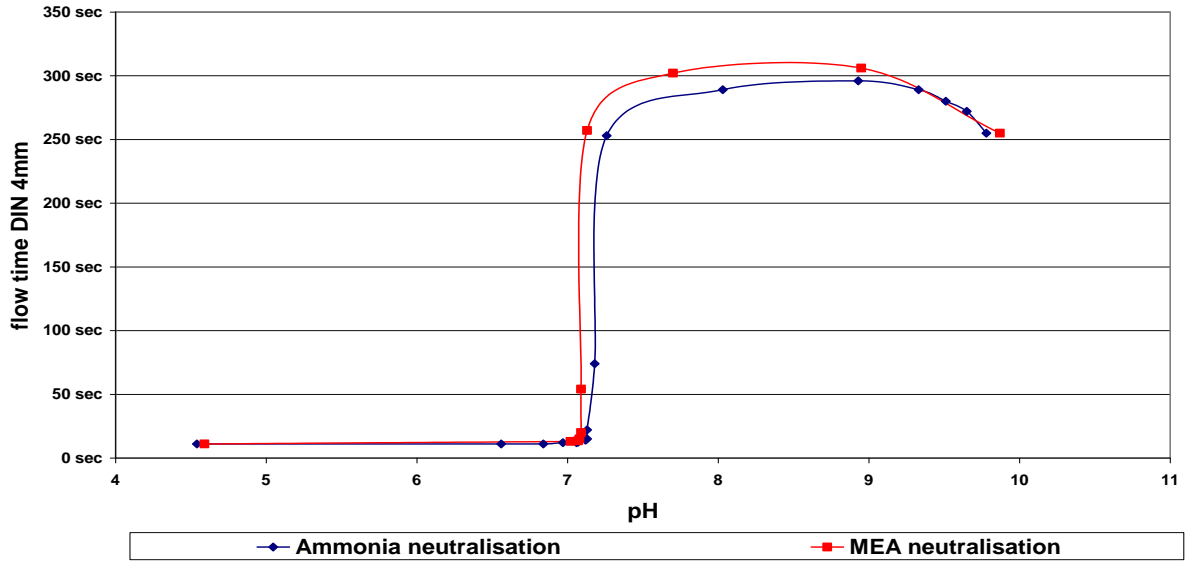

This data sheet is for your advice and information. Indulor disclaims any liability incurred with the use of these data or suggestions.