


PosiTector® 200 Series

Coating Thickness
Gages for measuring
on Concrete, Wood,
Plastic and more...



Advanced
models
measure up
to 3 layers
with graphics

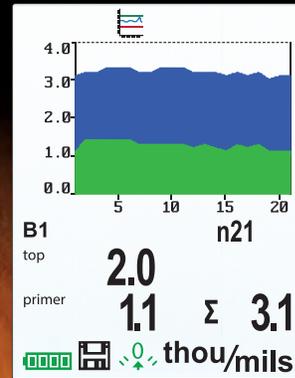

Available on the
App Store



DeFelsko®
The Measure of Quality

PosiTector® 200 Series

All Gages Feature...

Simple

- Ready to measure—no adjustment required to measure most coatings
- RESET feature instantly restores factory settings

Durable

- Solvent, acid, oil, water and dust resistant—weatherproof
- Shock-absorbing, protective rubber holster with belt clip
- Two year warranty on body AND probe

Accurate

- Responsive transducers provide fast, accurate readings
- Certificate of Calibration showing traceability to NIST or PTB included
- Proven non-destructive technique conforms to ASTM D6132 and ISO 2808

Versatile

- PosiTector body accepts all PosiTector probes easily converting from a coating thickness gage to a surface profile gage, dew point meter or wall thickness gage
- Flip display enables right-side-up viewing
- Uses alkaline or rechargeable batteries (built-in charger)

Powerful

- Continually displays average, standard deviation and min/max thickness
- USB port for connection to a Mac/PC and to supply continuous power
- Every stored measurement is date and time stamped
- PosiSoft USB Drive—stored readings, graphs and screen captures can be accessed using universal PC/Mac web browsers or file explorers. No software required.
- Includes PosiSoft Suite of solutions for analyzing and reporting data



Select from a variety of measurement ranges			
Probes	200B	200C	200D
Typical Applications	Polymer coatings on wood, plastic, etc.	Coatings on concrete, fiberglass, etc.	Thick, soft coatings such as polyurea, asphaltic neoprene, very thick polymers, etc.
Measurement Range*	13 – 1000 µm 0.5 – 40 mils	50 – 3800 µm 2 – 150 mils	50 – 7600 µm 2 – 300 mils
Accuracy	+/- (2 µm + 3% of reading) +/- (0.1 mil + 3% of reading)		+/- (20 µm + 3% of reading) +/- (1 mil + 3% of reading)
Minimum Layer Thickness^	13 µm 0.5 mil	50 µm 2 mils	500 µm 20 mils

* Range limits apply to polymer coatings. D probe— polyurea range is 50–5000 µm (2–200 mils).
^For multiple-layer applications only. Dependent on material being tested.

Select Standard or Advanced Features

Standard Models

Includes ALL features as shown on left plus...

- Measure the total thickness of a coating system
- Backlit monochrome display with transfective technology
- Storage of 250 readings


Advanced Models

Includes ALL features as shown on left plus...

- Measure the total thickness of a coating system or up to 3 individual layer thicknesses in a multi-layer system. Also features graphic readout for detailed analysis of the coating system
- High Contrast reversible color LCD
- Storage of 100,000 readings in up to 1,000 batches
- Graphics mode with screen capture
- Real-time graphing, picture prompting and batch notes
- Onscreen Batch Annotation—add notes, change batch names and more with built-in QWERTY keyboard
- WiFi technology wirelessly communicates with PosiSoft, downloads software updates and connects with mobile devices for expanded functionality
- Bluetooth® Wireless Technology for data transfer to a computer or optional portable printer

For a complete comparison of the Standard and Advanced features visit www.defelsko.com/p200

Easy-to-read graphic display provides clear, detailed analysis of coatings.

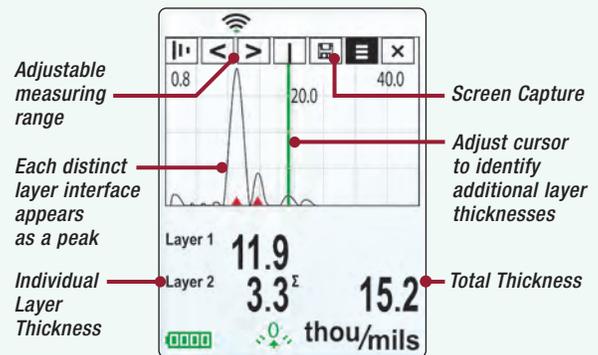

Advanced Model shown in Graphics mode

All gages come complete with body and probe, ultrasonic gel, precision plastic shims, protective rubber holster with belt clip, wrist strap, 3 AAA batteries, instructions, nylon carrying case with shoulder strap, protective lens shield, long form Certificate of Calibration traceable to NIST or PTB, USB cable, PosiSoft.net account, two year warranty on body and probe.

Size: 135 x 61 x 28 mm (5.25" x 2.4" x 1.1")

Weight: 140 g (4.9 oz.) without batteries
Conforms to ASTM D6132 and ISO 2808




PosiSoft® Suite of Software

3 FREE ways to view and report your data

PosiSoft Desktop Software (v 4)


Powerful desktop software (PC/Mac) for downloading, viewing, printing and storing measurement data. Includes customizable, templated PDF Report Generator. No internet connection required.

- Import readings directly from the gage via USB
- **Jobs** feature consolidates and organizes batches and reports
- Export all data, settings and templates for backup and sharing

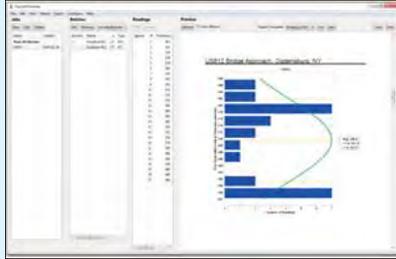

Generate Custom, Professional PDF Reports

- Include inspection information such as on-site pictures, screen captures, notes and more to communicate important details
- Create and save multiple custom layouts as templates – insert cover pages, add logos/images, and select font and point size
- Select the information to include for each product type – charts, histograms, readings, time stamps and more
- Compile multi-batch reports from one or more instrument types

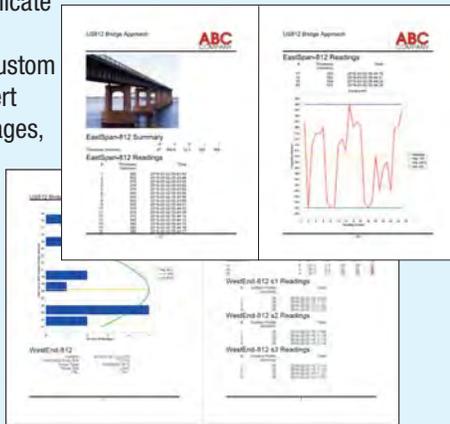

PosiSoft.net

A web-based application offering secure centralized management of readings. Access your data from any web-connected device.


- Synchronize measurement data when connected via USB, Bluetooth or WiFi wireless technology
- Securely store measurement data in the cloud and share with authorized users via a secure login
- Generate reports with graphs, annotations and images



PosiSoft USB Drive

A simple interface to retrieve data from your gage in a manner similar to a USB flash drive. No software required.

- Measurement data can be printed quickly from an HTML report or exported in .CSV format for further analysis in Excel

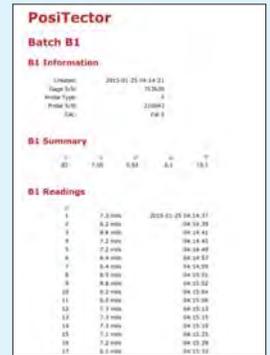

Learn more at www.DeFelsko.com/PosiSoft

	PosiSoft Desktop	PosiSoft.net	PosiSoft USB Drive
Generate basic, pre-formatted reports	◆	◆	◆
Generate professional PDF reports with custom formatting. Add pictures, logos, screen captures, notes and more.	◆	◆	
Export to .CSV (comma separated values)	◆	◆	◆
View and print readings stored on a PosiTector/PosiTest AT-A	◆	◆	◆
Add photos and notes to reading data	◆	◆	
Software installation required	◆		
Internet connection required		◆	
Default download location for batches and readings	Hard Drive	Cloud	Gage
Multi-language support: English, Spanish, German, French, Chinese and Korean	◆	◆	◆*
PC/Mac compatible	◆	◆	◆
FREE	◆	◆	◆
Compatible with all current PosiTector 6000/200/SPG/RTR/DPM/UTG and PosiTest AT series	◆	◆	◆†

*PosiSoft USB Drive supports all 15 languages supported by the PosiTector gage. † PosiTest AT-M is not supported by PosiTector USB Drive

DeFelsko®
The Measure of Quality

DeFelsko Corporation 800 Proctor Ave., Ogdensburg, New York 13669-2205 USA
Toll Free: 1-800-448-3835 • Tel: +1-315-393-4450 • Fax: +1-315-393-8471
techsale@defelsko.com • www.defelsko.com


Made in U.S.A.